




# Rechargeable Sealed Lead-Acid Battery

## PS-12120

### 12 Volt 12.0 Amp. Hrs.

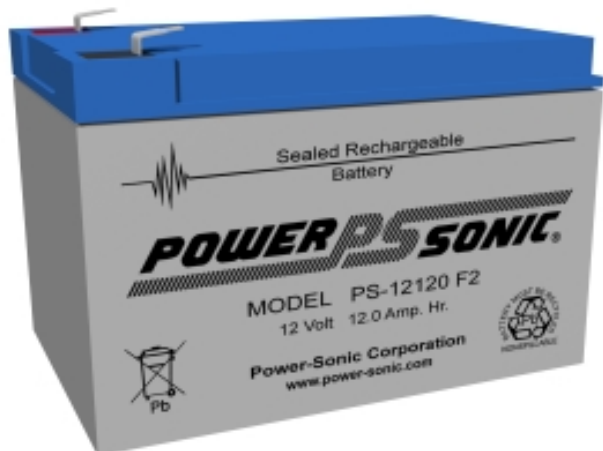

**Features:**


- Absorbent Glass Mat (AGM) technology for superior performance.
- Valve regulated, spill proof construction allows safe operation in any position.
- Power/volume ratio yielding unrivaled energy density.
- Rugged ABS plastic case and cover
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified.
- U.L. recognized under file number MH 20845.




**PERFORMANCE SPECIFICATIONS**

|  |  |
|--|--|
| <b>Nominal Voltage</b> .....                                       | 12 volts (6 cells in series)   |
| <b>Nominal Capacity</b>  |  |
| 20 hour rate (600mA to 10.50 volts) .....                          | 12.0 A.H.  |
| 10 hour rate (1.1A to 10.50 volts) .....                           | 11.0 A.H.  |
| 5 hour rate (2.1A to 10.20 volts) .....                            | 10.5 A.H.  |
| 1 hour rate (7.25A to 09.00 volts) .....                           | 7.25 A.H.  |
| <b>Approximate Weight</b> .....                                    | 8.5 pounds (3.86 kg)   |
| <b>Energy Density (20 hour rate)</b> .....                         | 1.69 Watt-hours/cubic inch (103.6 Watt-hours/l)                                      |
| <b>Specific Energy (20 hour rate)</b> .....                        | 16.9 Watt-hours/pound (37.3 Watt-hours/kg)   |
| <b>Internal Resistance (Fully Charged Battery)</b> .....           | 16 milliohms (approximately)   |
| <b>Maximum Discharge Current ( ≤ 7 Min.)</b> .....                 | 36 amperes   |
| <b>Maximum Short-Duration Discharge Current ( ≤ 10 Sec.)</b> ..... | 120 amperes  |
| <b>Terminal configurations</b> .....                               | "F2": Quick disconnect tabs, 0.250" x 0.032"- Mate with AMP. INC FASTON "250" series |
| <b>Shelf Life — % of nominal capacity at 68° F (20° C)</b>         |  |
| 1 Month.....   | 97%  |
| 3 Months.....  | 91%  |
| 6 Months.....  | 83%  |
| <b>Operating Temperature Range</b>                                 |  |
| <b>Charge</b> .....  | -4°F (-20°C) to 122°F (50°C)   |
| <b>Discharge</b> .....   | -4°F (-20°C) to 140°F (60°C)   |
| <b>Case</b> .....  | ABS Plastic  |


**Shelf Life and Storage**

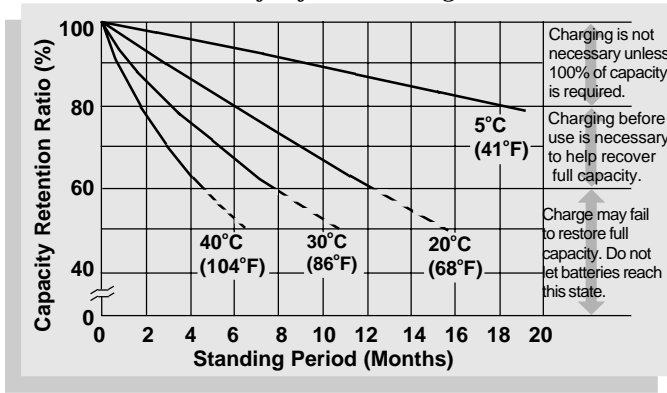


**Discharge Characteristics**

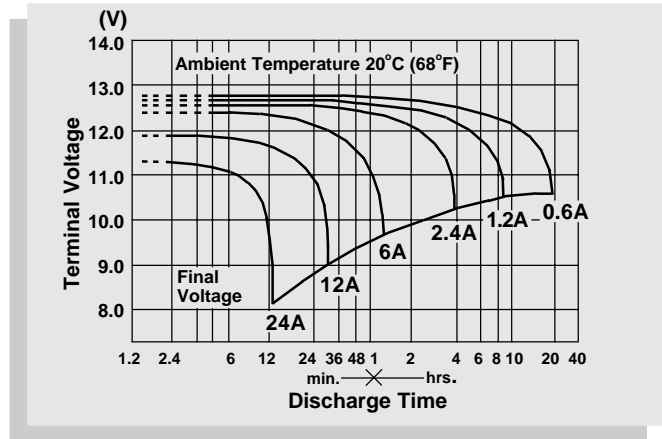


**Life Characteristics in Stand-By Use**

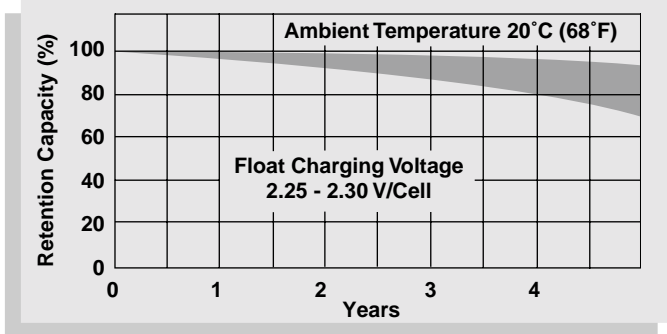

**Discharge Time vs. Discharge Current**

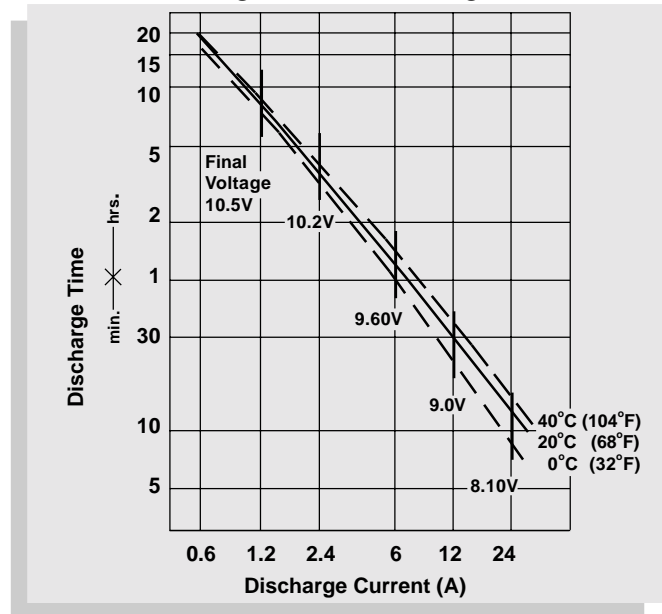

**Life Characteristics in Cyclic Use**

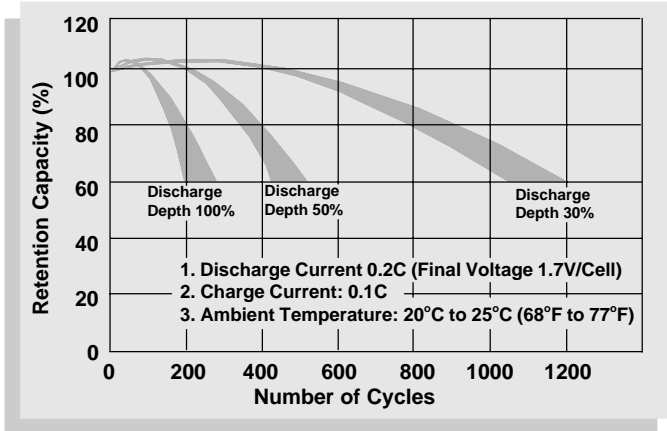

**CHARGING**


**Cycle Applications:** Limit initial current to 3.6A. Charge until battery voltage (under charge) reaches 14.40 to 14.70 volts at 68°F (20°C). Hold at 14.40 to 14.70 volts until current drops to approximately 120mA. Battery is fully charged under these conditions, and charger should either be disconnected or switched to "float" voltage.

**"Float" or "Stand-By" Service:** Hold battery across constant voltage source of 13.50 to 13.80 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**NOTE:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Physical Dimensions: in. (mm)

Terminals: F2 (mm)

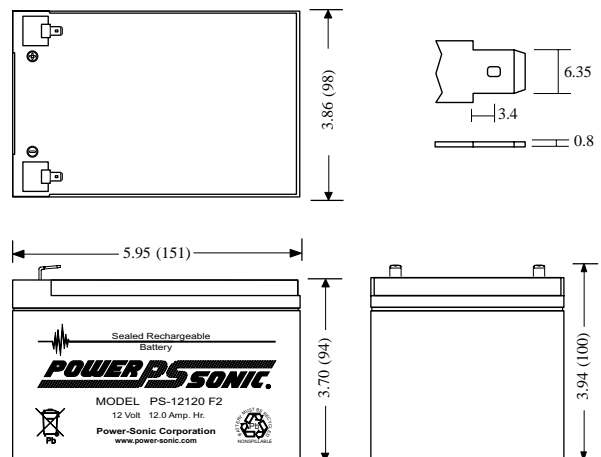

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.



**SALES & MARKETING**  
 3106 Spring Street  
 Redwood City, CA 94063 USA  
 Tel: 650-364-5001 Fax: 650-366-3662  
 national-sales@power-sonic.com



www.power-sonic.com

**ISO 9001-2000**  
 FM39170

**CUSTOMER SERVICE**  
 7550 Panasonic Way  
 San Diego, CA 92154 USA  
 Tel: 619-661-2030 Fax: 619-661-3648  
 customer-service@power-sonic.com