


TSI SidePak™ SP330/350 Quick Reference Card




- Press to power ON/OFF.
- Press and hold for 3 seconds to power off.
- Press to return to previous menu or screen.
- to scroll through menu selections or change settings.




- to select/enter value.




Tamper Protection:
Press and hold  and  to lock or unlock keypad.




Auto
Cycle



▲▼ To Scroll through menu

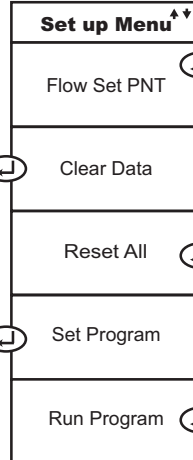

"ENTER = CLEAR DATA"
 to execute clear Data Function



Auto
Cycle

Pump will start

- Let pump run 2 min.
- Connect Calibrator
- Use   keys to increase or decrease flow rate to desired reading on calibrator.
- Press  to accept new flow rate.
- Instrument will display new estimated run time and return to ready mode.

"ENTER = RESET FLOW"
to execute reset all functions


TOTAL TIME ▲▼
xxx min. (5-999 min.)

- Use   to select run time.
- Press  to execute new run time

Delay ▲▼
xxx Min (1-999 min.)


- Use   to select delay start time
- Instrument returns to ready mode

- Pump will turn on and display



OR

- Pump will display



- If programmed to start after a delay



TRUST. SCIENCE. INNOVATION.



TTT Environmental
Instruments and Supplies

*The preferred source for instrument
Rentals, Sales, Service and Supplies!*

4201 B Street
Anchorage, AK 99503
(907) 770-9041

www.tttenviro.com

25420 74th Avenue S.
Kent, WA 98032
(253) 373-9041

info@tttenviro.com

P/N 1980540, Rev. B